s1010-LPD DRAWING NUMBER

NONE

PAT

APPROVED BY: CR

CHECKED BY: **CR**

DRAWN BY: **KK**

OR VOID DATA

Я

CAN ASSUME NO RESPONSIBILITY FOR

M

TOLERANCE AND CHANGE WITHOUT NOTICE

DIMENSIONS ARE SUBJECT TO MANUFACTURERS

NUMBER





LOCATION

LARGE GENERAL PURPOSE ROOF DRAIN

2 1/2" HIGH CAST IRON LOW PROFILE DOME

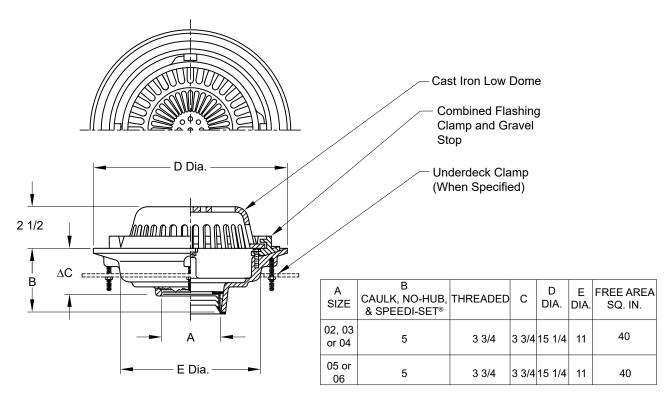


Fig. 1010C(-LPD) CAULK OUTLET Fig. 1010Y(-LPD) NO-HUB OUTLET Fig. 1010T(-LPD) THREADED OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Body, Combined Flashing Clamp and Gravel Stop with Cast Iron Low Dome.

∆ This Dimension to Internal Stop of Speedi-Set® Gasket

VARIATIONS:

L Speedi-Set® Service Weight Outlet Conn. (02, 03, & 04 Sizes Only) LXH Speedi-Set® Extra Heavy

Duty Outlet Conn. (02, 03, & 04

Sizes Only)

Sump Receiver -R

Underdeck Clamp -C Vandal Proof Dome -U

Extension (Specify Height) -E

Secondary Flashing Clamp -C2 Adjustable Extension -AE

Roof Deck Plate -RDP

OPTIONAL MATERIALS:

Galvanized Cast Iron Body and Collar -G Galvanized Cast Iron Dome -CIDG

WEIGHT VOLUME FIGURE NUMBER POUNDS CUBIC FEET Revised Variations, Fig. Opts Added ® to "Speedi-Set" HS KK CL B A 1010-LPD REV. DATE DESCRIPTION CKD. BY