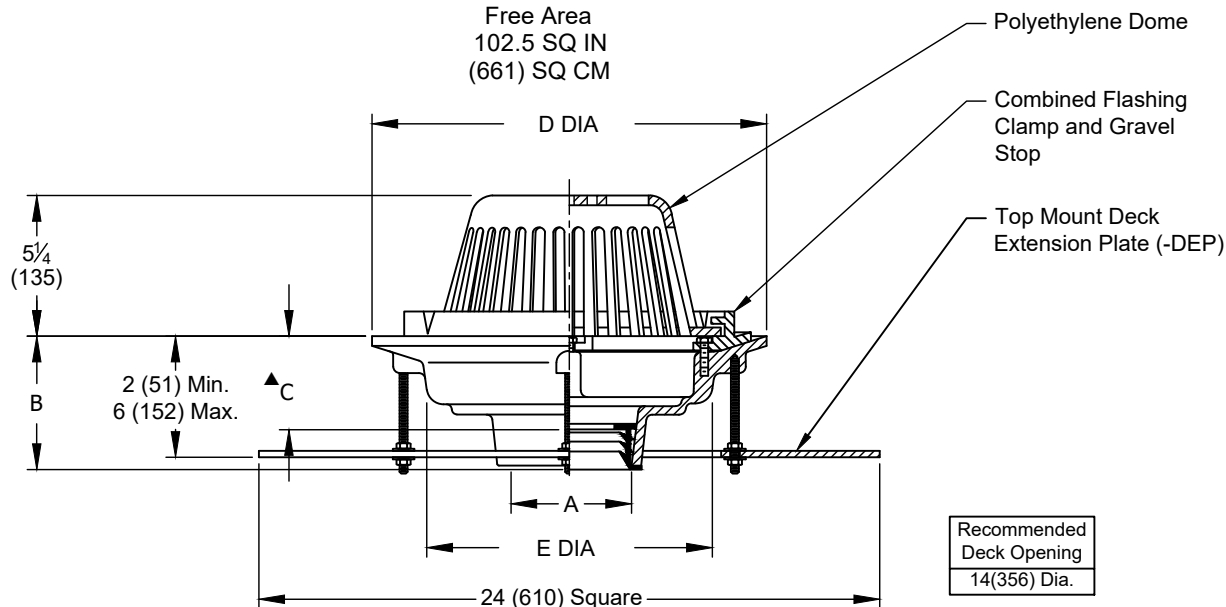


GENERAL PURPOSE ROOF DRAIN

15 1/4 (387) DIAMETER - LOW PROFILE DOME

Free Area
102.5 SQ IN
(661) SQ CM

[illegible]

▲ This dimension to internal stop for Speedi-Set® gasket.

**** For 10(250)-16 outlet drain the dome height is 8 1/4(210) and is regularly furnished in cast iron and is not available in polyethylene.**

	Fig. 1010C-DEP.....CAULK OUTLET
	Fig. 1010T-DEP.....THREADED OUTLET
	Fig. 1010Y-DEP.....NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron body with Top Mount Deck Extension Plate, Combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

VARIATIONS:

- ☐ L Speedi-Set® Service Weight
Outlet Conn. (02(50), 03(75),
and 04(100) Sizes Only)
- ☐ LXH Speedi-Set® Extra Heavy
Outlet Conn. (02(50), 03(75)
and 04(100) Sizes Only)
- ☐ Vandal Proof Dome -U
- ☐ Longer All Thread Rods -LS
(Specify Length Required)

OPTIONAL MATERIALS:

- ☐ *Aluminum Dome -AD
☐ *Cast Iron Dome -CID
☐ *Galvanized Cast Iron Dome -CIDG
☐ Galvanized Cast Iron Body &
 Collar -G
☐ *Rough Bronze Dome -RBD

*** Optional Domes' free area are as follows:**

Aluminum	98(632)
Cast Iron	80(516)
Bronze	95(613)

NOTE: Dimensions shown in parentheses are in millimeters

B A	12-27-23 2-23-23	Revised Variations Added ® to "Speedi-Set"	HS KK	CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1010-DEP
REV.	DATE	DESCRIPTION	BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov